

# INOX BAG HOUSING

## SBH-SPC 3 & 4

### Materials of Construction

Sump:	316L Stainless Steel Polycoated
Head:	316L Stainless Steel
V-Band Clamp:	304L Stainless Steel
Seal:	Buna-N (EPDM/Viton/Teflon)
Basket:	316L Stainless Steel
Legs:	304L Stainless Steel (optional)

### Certification

1. PED compliant.
2. DWI approved.

### Construction Notes

1. 316L Stainless Steel provides enhanced corrosion resistance, with the polycoat providing a protective finish.
2. 1/8" perforated Stainless Steel basket.

### Technical Data

Flow rates based on SPECTRUM SBP 25 micron bag.

Sizes (Standard Bag Sizes)	3, 4	
Maximum Operating Temperature (°C)	120	
Maximum Operating Pressure (bar)	10	
Ports (" BSPT-M)	1½	
Bag Configuration	1	
Vent Port (" BSPF)	1 x ¼	
Gauge Ports (" BSPF)	2 x ¼	
Flow Rates (lpm)	Size 3	50
	Size 4	100


### Inox Bag Housing Range

Also available from the SPECTRUM Inox Bag Housing family:

- Standard Single Bag Housing Size 1&2 (SBH-SPC)
- Standard Single Bag Housing Size 3&4 (SBH-SPC)
- Premier Single Bag Housing Size 1&2 (PBH-SPC)
- Premier Multi-Round Bag Housing (PBH-SPC)



Size 3 bag housing  
with optional  
pressure gauges

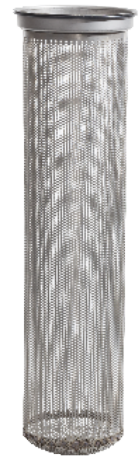

Stainless Steel  
basket